Parallel

2.13 Spacing

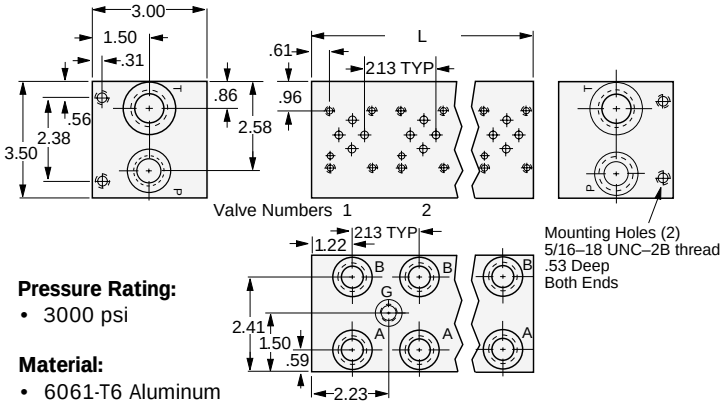

Pressure Rating:
- 3000 psi

Material:
- 6061-T6 Aluminum

Series

2.13 Spacing

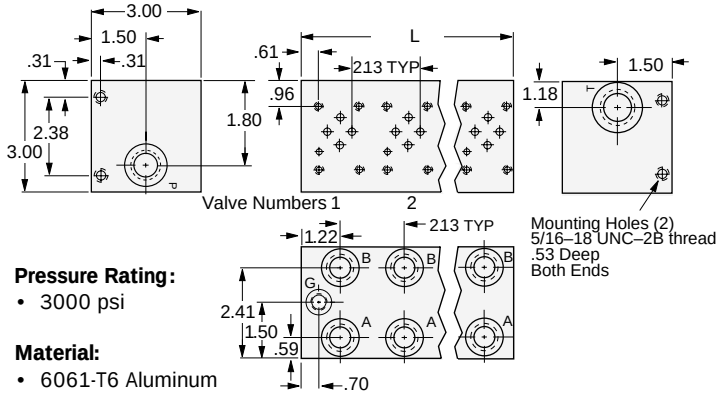

Pressure Rating:
- 3000 psi

Material:
- 6061-T6 Aluminum

Optional load sense checks are available on A and B ports; please consult factory. To add optional relief cavity, add "R" after part number and specify cavity (generic 10-2 or Sun T-10A cavities available). Example: 10004R R=10-2.

Optional Mounting Bracket Kit
Part No. SFP10081



PORTS:
- T
  1 1/16-12 O-ring port (SAE -12)
- A & B
  3/4-16 O-ring port (SAE -8)
- G Gauge with plug
  7/16-20 O-ring port (SAE -4)
- P
  7/8-14 O-ring port (SAE -10)

Parallel



Series



TYPE	NO. OF VALVES	PART NUMBER	"L" INCHES	APPROX WT LBS.
Parallel	2	SFP10002	4.57	4.1
	3	SFP10003	6.70	6.1
	4	SFP10004	8.83	8.1
	5	SFP10005	10.96	10.1
	6	SFP10006	13.09	12.0
	7	SFP10007	15.22	14.0
	8	SFP10008	17.35	16.0
	9	SFP10009	19.48	18.0
	10	SFP10010	21.61	20.0
Series	2	SFP10052	4.57	3.5
	3	SFP10053	6.70	5.2
	4	SFP10054	8.83	6.9
	5	SFP10055	10.96	10.0
	6	SFP10056	13.09	12.0

DO3 Subplates

Side Ported

Part Number SFP10101

Port Size:
- 9/16-18 O-ring ports (4) (SAE -6)

Pressure Rating:
- 3000 psi

Material:
- 6061-T6 Aluminum

Two (2) 1/4-20 X 1 inch long socket head cap screws are furnished with each subplate (90012)

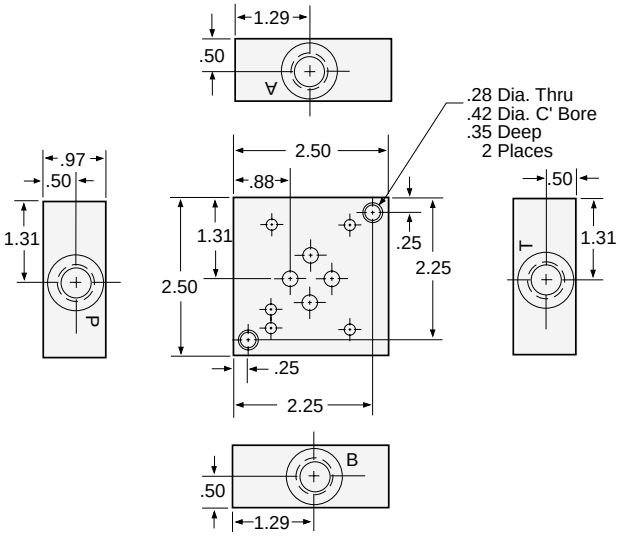

Back Ported
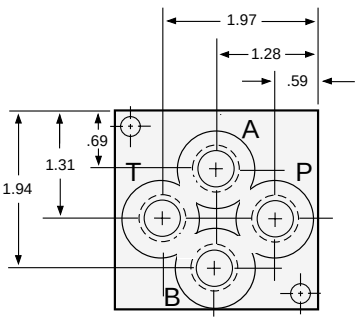
Part Number SFP10102