DO8 Manifolds

Parallel

5.25 spacing

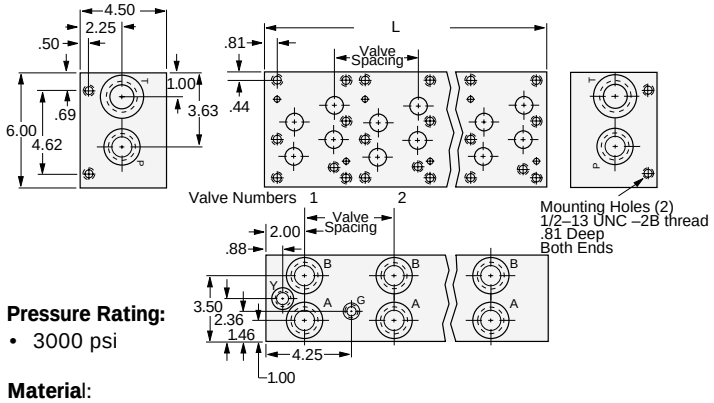

Pressure Rating:
- 3000 psi

Material:
- 6061-T6 Aluminum

Series

5.25 spacing

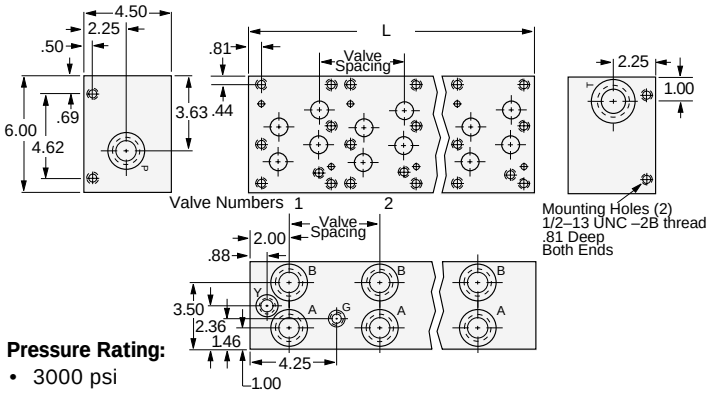

Pressure Rating:
- 3000 psi

Material:
- 6061-T6 Aluminum

Optional Mounting Bracket Kit: Part Number SFP10083

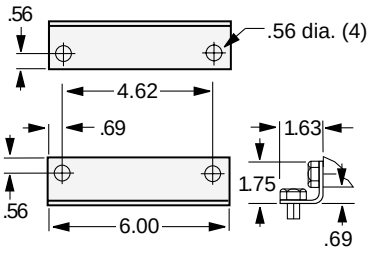

Ports

- P, A, & B: 1 5/16-12 O-ring ports (SAE -16)
- T: 1 5/8-12 O-ring ports (SAE -20)
- Y: 9/16-18 O-ring port (SAE -6)
- X (optional; not shown): 7/16-20 O-ring port (SAE -4)
- G Gauge with plug: 7/16 -20 O-ring port (SAE -4)

Parallel



Series



TYPE	NO. OF VALVES	PART NUMBER	"L" INCHES	APPROX WT LBS.
Parallel	2	SFP10032	10.50	25.4
	3	SFP10033	15.75	38.1
	4	SFP10034	21.00	50.9
Series	2	SFP10067	10.50	25.4
	3	SFP10068	15.75	38.1

To add optional relief cavity, add "R" after part number and specify cavity (generic 10-2 or Sun T-10A cavities available). Example: 10004R R=10-2.

DO8 Subplate

Side Ported

Part Number SFP10110

Port Sizes:
- P, T, A & B
  1 5/16-12 O-ring port
  (SAE -16)
- X & Y
  9/16-18 O-ring port
  (SAE -6)

Pressure Rating: 3000 psi

Material: 6061-T6 Aluminum

Two (2) 1/2-13 X 2 long socket head cap screws are furnished with each subplate (90016)

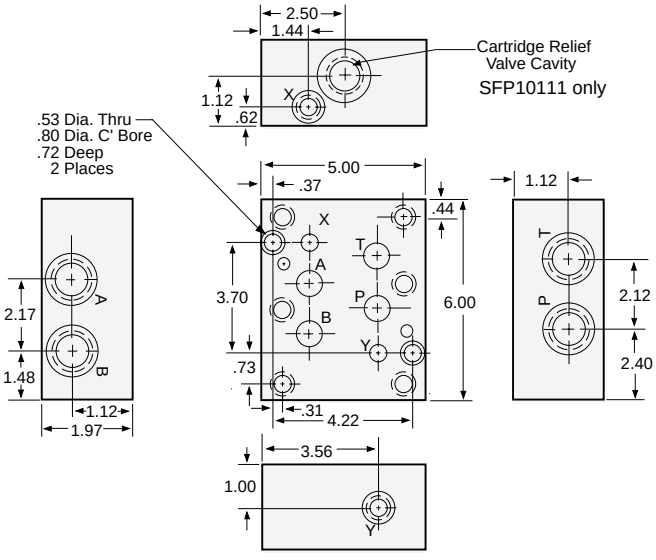

Side Ported

with relief valve cavity
Part Number SFP10111

The Relief Valve Cavity is machined to dimensions furnished by the following manufacturers:

Compact Controls	109
Delta	E Series
Fluid Controls	SC-316
Fluid Power Systems	10-2
HydraForce	VC-10-2
Modular Controls	C-10-2
Parker	C-10-2